


PRODUCT SPECIFICATION

LAN cable

CAT. 6 SFTP 4x2x23AWG

FIGURE

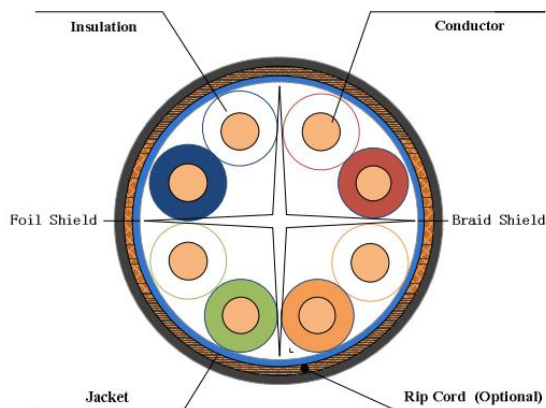

CONSTRUCTION

Inner conductor	Solid Bare Copper	$\Phi 0.57 \pm 0.02\text{mm}$
Insulation	Solid HDPE	$\Phi 1.16 \pm 0.05\text{mm}$
	Color	1 Blue & White/ Blue 2 Orange & White/ Orange 3 Green & White/ Green 4 Brown & White/ Brown
Filler	PE	“+” shape
Shield	Line to separate	Foil
	Total shield	Foil + Copper Braid Coverage $\geq 40\%$
Sheath	PVC, PE, FRPVC, LSZH	$\Phi 7.20 \pm 0.30\text{mm}$
	Rip cord	Nylon (Optional)

MECHANICAL PROPERTIES

Bending radius (single)	mm	$8 \times \text{cable OD}$
-------------------------	----	----------------------------

ELECTRICAL PROPERTIES

Impedance	Ω	$100 \pm 15 @ \leq 100\text{MHz}$ $100 \pm 25 @ 100 \sim 250\text{ MHz}$
DC Resistance unbalance	For conductors, % For pairs, %	≤ 2 ≤ 4
Conductor DC Resistance	$\Omega/100\text{m}$	$\leq 9.5 @ 20^\circ\text{C}$
Insulation Resistance	$\text{M}\Omega.\text{km}$	≥ 5000
Delay Skew	ns/100	≤ 45

PRODUCT SPECIFICATION

LAN cable

CAT. 6 SFTP 4x2x23AWG

TRANSMISSION PROPERTIES

Frequency	Attenuation	Return loss	NEXT	PS NEXT	EL FEXT	PS EL FEXT	Delay
MHz	dB/100m	dB	dB	dB	dB	dB	ns/100m
4	3.8	23.0	66.3	63.3	56.0	53.0	552
8	5.3	24.5	61.8	58.8	49.9	46.9	547
10	6.0	25.0	60.3	57.3	48.0	45.0	545
16	7.6	25.0	57.2	54.2	43.9	40.9	543
20	8.5	25.0	55.8	52.8	42.0	39.0	542
25	9.5	24.3	54.3	51.3	40.0	37.0	541
31.25	10.7	23.6	52.9	49.9	38.1	35.1	540
62.5	15.4	21.5	48.4	45.4	32.1	29.1	539
100	19.8	20.1	45.3	42.3	28.0	25.0	538
200	29.0	18.0	40.8	37.8	22.0	19.0	537
250	32.8	17.3	39.3	36.3	20.0	17.0	536

STANDARDS

ANSI/TIA/EIA 568-B.2-1

Compliant